

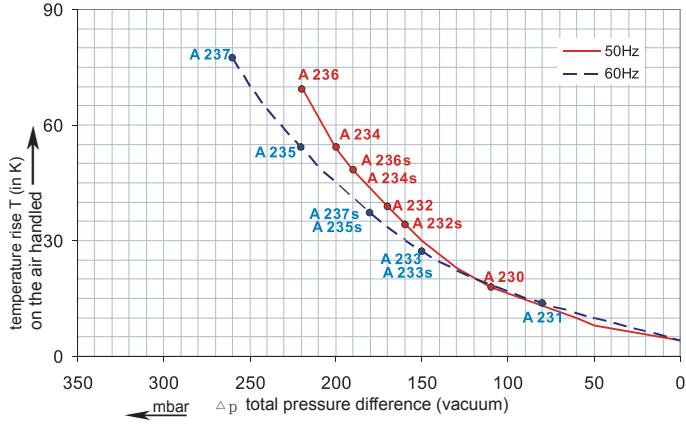
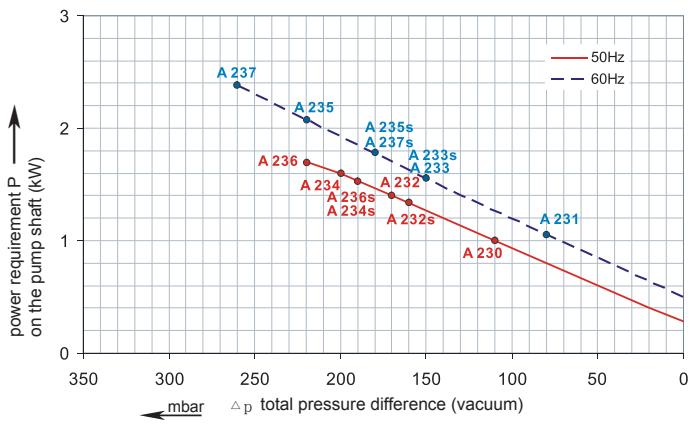
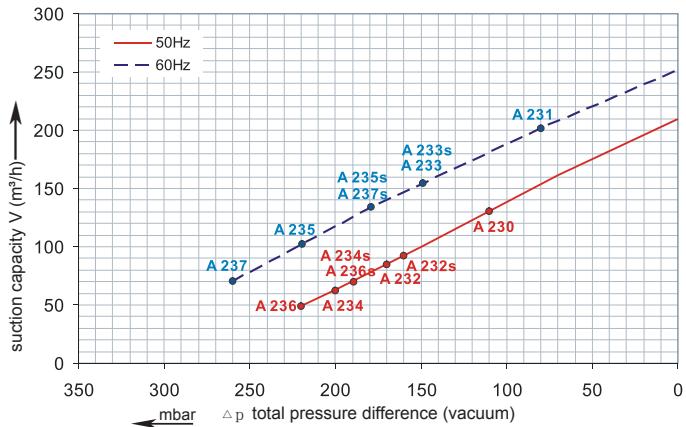
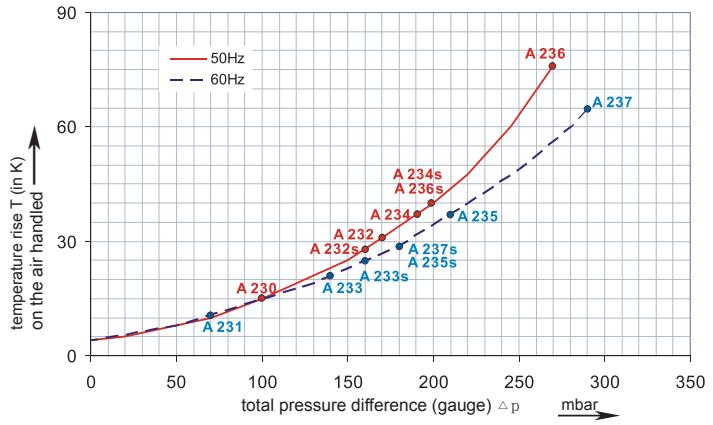


## PUMP: ORB 51

### Performance Curve for Vacuum

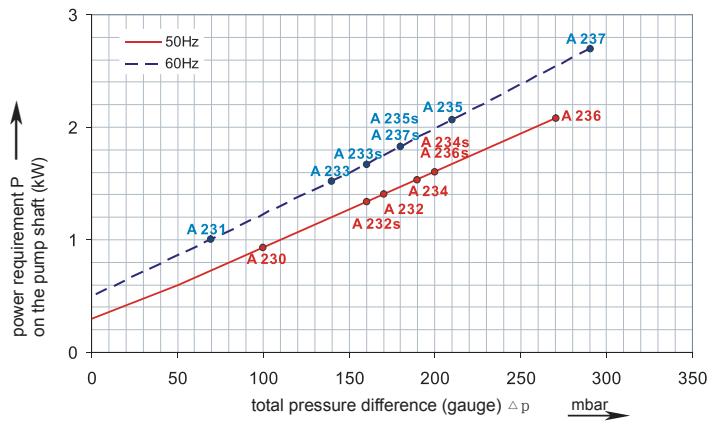

### Performance Curve for Compressor

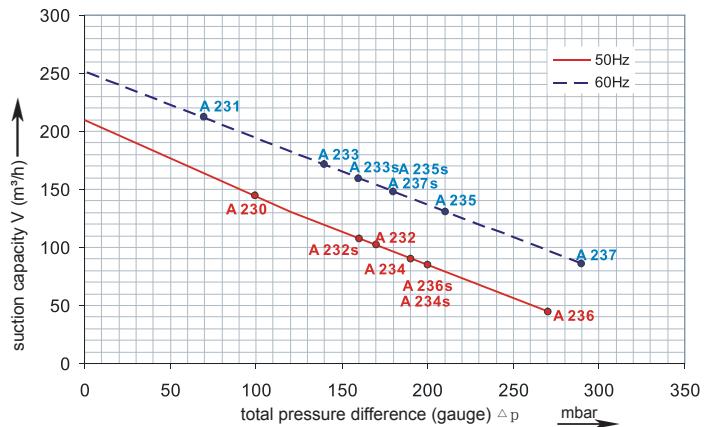

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.  
 The total pressure differences are valid for suction and ambient temperatures up to 25 °C.  
 For other conditions please confer with us.

Each ORB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

## Selection and ordering data

### Type 2RB510

Curve No.	Order No.	Frequency Hz	Rated power kW	Input voltage V	Input current A	Permissible total differential pressure <sup>2)</sup> Vacuum mbar	Compressor mbar	Sound pressure level <sup>3)</sup> dB(A)	Weight ca. kg
-----------	-----------	--------------	----------------	-----------------	-----------------	--	-----------------	--	---------------

#### 3~ 50/60 Hz IP55 insulation material class F 1)

A 230	UÜÓÁ FEEÉÉHÁ	50	0.85	200D ... 240D	345Y..415Y	4.0D	2.3Y	-110	100	64	20
A 231	UÜÓÁ FEEÉÉHÁ	60	0.95	220D ... 275D	380Y..480Y	4.2D	2.4Y	-80	70	70	20
A 232	UÜÓÁ FEEÉÉHÁ	50	1.3	200D ... 240D	345Y..415Y	6.6D	3.8Y	-170	170	64	22
A 233	UÜÓÁ FEEÉÉHÁ	60	1.5	220D ... 275D	380Y..480Y	6.9D	4.0Y	-150	140	70	22
A 234	UÜÓÁ FEEÉÉHÁ	50	1.6	200D ... 240D	345Y..415Y	7.5D	4.3Y	-200	190	64	23
A 235	UÜÓÁ FEEÉÉHÁ	60	2.05	220D ... 275D	380Y..480Y	7.6D	4.4Y	-220	210	70	23
A 236	UÜÓÁ FEEÉÉHÁ	50	2.2	200D ... 240D	345Y..415Y	9.7D	5.6Y	-220	270	64	25
A 237	UÜÓÁ FEEÉÉHÁ	60	2.55	220D ... 275D	380Y..480Y	10.3D	6.0Y	-260	290	70	25

#### 1~ 50/60 Hz IP55 with attached condenser for continuous operation

A 232s	UÜÓÁ FEEÉÉHÁ	50	1.1	230		7.3		-160	160	64	21
A 233s	UÜÓÁ FEEÉÉHÁ	60	1.3	230		8.3		-150	160	70	21
A 234s	UÜÓÁ FEEÉÉHÁ	50	1.5	230		9		-190	200	64	24
A 235s	UÜÓÁ FEEÉÉHÁ	60	1.75	230		10		-180	180	70	24



#### Other voltage ranges

UÜÓÁ F □ □		
50Hz	60Hz	↑ ↑
185...225 V D/320...390 V Y	200...240 V D/345...415 V Y	H 1
200...240 V D/345...415 V Y	200...275 V D/380...480 V Y	H 6
345...415 V D	380...480 V D	H 7
500 V D	575VD	C 5

Machines according to the ATEX norm 94/4 EG are available for the whole performance range.

Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.

1~		
100 / 200 V	100 / 200 V	V 4
115 / 230 V	115 / 230 V	V 5
230V	230V	A 1

Further voltage range on request; please quote in plain text.

All ORB achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.